

ALL-NEW UW SERIES  
HARDMOUNT WASHER-EXTRACTORS



**SERIOUS ABOUT LAUNDRY.**

**UniMac**<sup>®</sup>

# UNIMAC'S UW SERIES:

**LONGEST LASTING. HARDEST WORKING.**

UniMac has been recognized around the world as the leading manufacturer of commercial laundry equipment. We produce, sell and support more commercial washers and dryers in North America than any other company.

Every machine in the UW Series is designed to handle the toughest demands and heaviest on-premises laundry use. The result? The longest lasting machines in the industry. Why? Every UW Series machine:

**HANDLES DOUBLE THE SPINNING FORCE COMPARED TO CABINET WASHER-EXTRACTORS**

**OFFERS THE LOWEST COST OF OWNERSHIP**

**IS DESIGNED TO HANDLE THE LARGEST AND MOST UNBALANCED LOADS**

**INDUSTRIAL STRENGTH MEANS LESS DOWNTIME, INCREASED EFFICIENCY AND A LONGER MACHINE LIFE**





## UW SERIES HARDMOUNT WASHER-EXTRACTORS 45-65 LB LAUNDRY'S NEW HEAVYWEIGHT

UniMac's totally redesigned UW45 & 65 washer-extractors take industrial quality to the next level. They are extremely efficient, include top-of-the-line innovative features and still have the lowest cost of ownership — everything you'd expect from the world's largest commercial laundry manufacturer.

Most commercial laundry units run an average of three to five cycles per day. The industrial UW45 & 65 washer-extractors are designed to run 24/7. In fact, they are setting a new standard for on-premises laundry:

### DRIVE SHAFT ASSEMBLY

Built for industrial needs, cylindrical front/spherical rear bearings can handle 200% more force than ball bearings. The result? A longer lasting machine.



### FRAME



The plate-steel industrial frame is designed to handle vibration and unbalanced loads effortlessly. It can also be placed on an existing UW60 concrete pad.

### MOTOR

Our motor has 67% more horsepower than cabinet washers of the same capacity. More power means the ability to handle around-the-clock use, increasing productivity and the life of the motor.

### INVERTER DRIVE

The proven technology and proprietary design provide smooth, reliable power for optimal wash and extract performance.

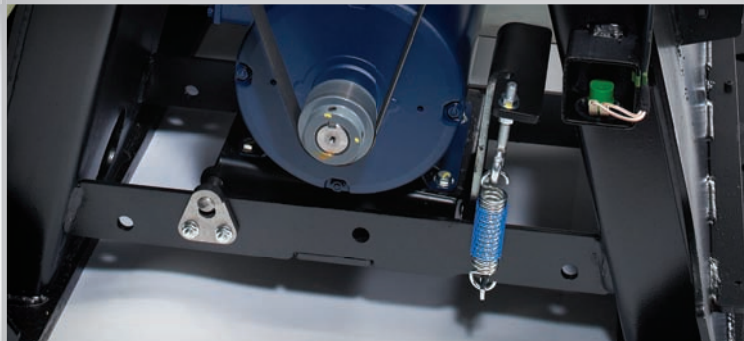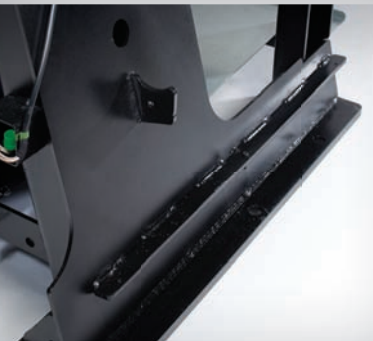


## A PROVEN RECORD OF RELIABILITY

At UniMac, we don't leave anything to chance. Our product development teams utilize a 5-step quality process to ensure optimal product performance. We test our machines in a state-of-the-art test lab and push them to the limit — all to make sure you get the best product on the market and the best performance in the field.



# THE ULTIMATE IN PERFORMANCE

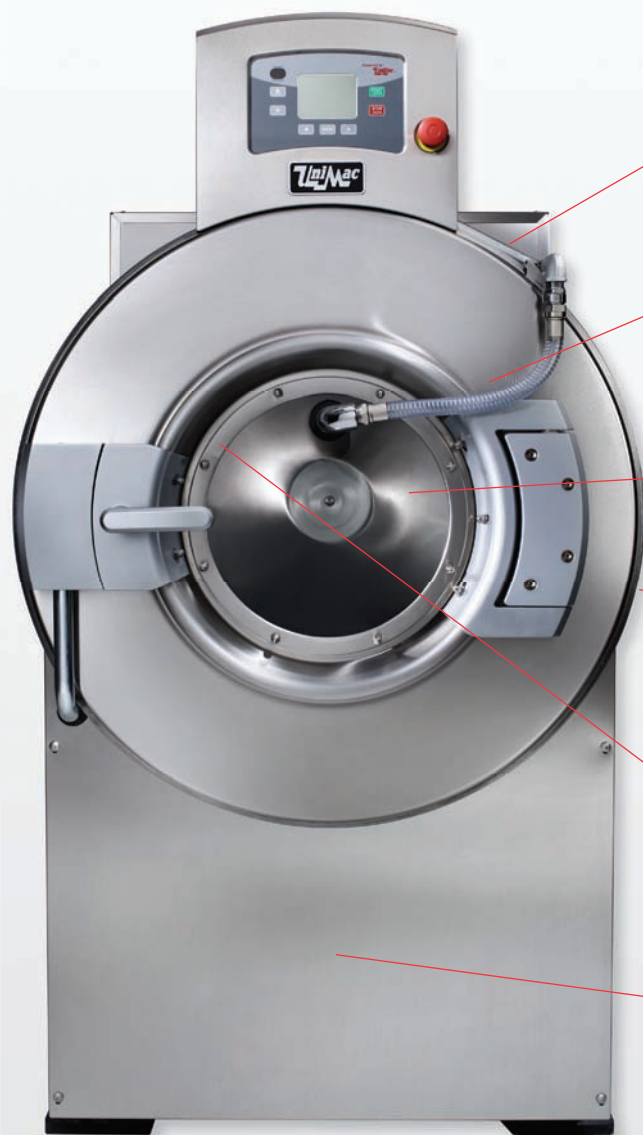

## 400 G-FORCE EXTRACTION

The fastest hardmount in the industry. The result is maximum water removal, allowing your laundry to run at premium efficiency.

## SPRAY RINSE

A 200% quicker fill means the cycle goes faster, allowing the user to do more in less time. The shower rinse feature pulls water through the wash load for a cleaner rinse compared to a bath soak.

## WIDTH

The 34.24" width easily fits through 36" commercial doorways and makes installation a breeze.

## HEIGHT


The 28.1" elevated door height ensures wash baskets can easily roll under the door for easy loading and less bending for users. This elevation eliminates the need for an expensive secondary machine base — perfect for OPL use.

## DOOR

New door is standardized to open from the right paired with a proven roll pin/cam lock system to ensure smooth opening and closing.

## FRAME

Our new frame design optimizes strength from every ounce of steel. It weighs more than twice as much as a cabinet washer frame.



## TAKE COMPLETE CONTROL

Our UniLinc™ controls are revolutionizing the way people think about laundry.

---

**MONITOR YOUR LAUNDRY**

---

**ENJOY EASE OF USE**

---

**SAVE ON ENERGY**

---

**REDUCE DOWNTIME**

---



# OUR COMMITMENT

Our customers are the direct focus of every product we manufacture and every decision we make. Our commitment is to delight each customer with every interaction they have with our company without question or compromise. It's what we call Customer One.

We make sure every piece of UniMac equipment comes with peace of mind and the support you need to help your business succeed. We are with you every step of the way for:

## WARRANTY PROTECTION

A five-year warranty covers the frame, basket, shaft, bearings and seals from failure or breakage during normal operation due to defects in material or workmanship. A limited three-year warranty is offered on all other parts.

## SERVICE PARTS AVAILABILITY

## SUPPORT FROM A TEAM OF TRAINED TECHNICIANS AND A WORLDWIDE NETWORK OF DISTRIBUTORS

## SERVICE TRAINING CERTIFICATION FOR DISTRIBUTORS THROUGH ALLIANCE LAUNDRY SYSTEMS UNIVERSITY

## UW SERIES — AT A GLANCE:

- Industrial construction is built to run 24/7
- Helps reduce drying time and increase through-put with an industry-leading 400 G-Force hardmount
- Bigger motor has 67% more horsepower than cabinet washer-extractors
- Handles unbalanced loads effortlessly
- Exclusive Spray Rinse saves time and water
- 34.24" width easily fits through 36" commercial doorways
- Advanced UniLinc™ technology with 41 programmable cycles
- Perforated cylinder ribs maximize wash action
- Auto leak detection greatly reduces water loss due to valve blockages or failures
- Six bolts with vertical wrench access make installation easier



# UW SERIES HARDMOUNT WASHER-EXTRACTORS 45-65 LB – UniLinc™ Control

SPECIFICATIONS		UW45		UW65	
Control Options		UniLinc™		UniLinc™	
Capacity - lb (kg)		45 (20)		65 (30)	
Cylinder Diameter - in (mm)		31" (787)		31" (787)	
Cylinder Depth - in (mm)		16.5" (419)		22" (559)	
Cylinder Volume - cu. ft. (liters)		7.21 (204)		9.61 (272)	
Height - in (mm)		64.50" (1638)		64.50" (1638)	
Width - in (mm)		34.25" (870)		34.25" (870)	
Depth - in (mm)		42.85" (1088)		48.35" (1228)	
Door Opening Size - in (mm)		17.8" (452)		17.8" (452)	
Door Bottom to Floor - in (mm)		28.09" (713)		28.09" (713)	
Motor Size - HP (kW)		5 (3.7)		5 (3.7)	
Total # of Speeds		V Sp	L Sp	M Sp	V Sp
		9	5	6	9
Gentle Wash Distribution Very Low Low Medium High Very High Ultra High		30 (0.4)	30 (0.4)	30 (0.4)	30 (0.4)
		42 (.78)	42 (.78)	42 (.78)	42 (.78)
		75 (2.5)	75 (2.5)	75 (2.5)	75 (2.5)
		248 (27)	248 (27)	248 (27)	248 (27)
		477 (100)	477 (100)	477 (100)	477 (100)
		674 (200)	—	674 (200)	674 (200)
		754 (250)	—	—	754 (250)
		826 (300)	—	—	826 (300)
		954 (400)	—	—	954 (400)
Drain Diameter - in (mm)		3" (76)		3" (76)	
Steam Connection (Optional) - in (mm)		1/2" (13)		1/2" (13)	
Water Inlet Connection - in (mm)		4 @ 3/4" (19)		4 @ 3/4" (19)	
Shipping Dimensions	Width	37.2" (945)		37.2" (945)	
	Depth	53.8" (1367)		53.8" (1367)	
	Height	65" (1651)		65" (1651)	
Net Weight - lb (kg)		1020 (463)		1060 (481)	
Standard Shipping Weight - lb (kg)		1065 (483)		1105 (501)	
Slat Crate Shipping Weight - lb (kg)		1190 (540)		1230 (558)	
Agency Approvals		ETL, CE		ETL, CE	



**To learn more, or to find a distributor in your area, visit [UNIMAC.COM](http://UNIMAC.COM)**  
**Alliance Laundry Systems - Shepard St, Ripon WI 54971 - 1.800.587.5458**

Consult your UniMac distributor for details. For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2000.

©2012 Alliance Laundry Systems LLC.

Printed in the U.S.A.



**SERIOUS ABOUT LAUNDRY.**

DISTRIBUTOR INFORMATION HERE